




Poly Documentation

Contents

1. Polycom RealPresence Group 300 System.....	3
---	---

Polycom RealPresence Group 300 System

The following figure and accompanying table below shows how the system web interface settings relate to hardware input and outputs on the back of the RealPresence Group 300 system.

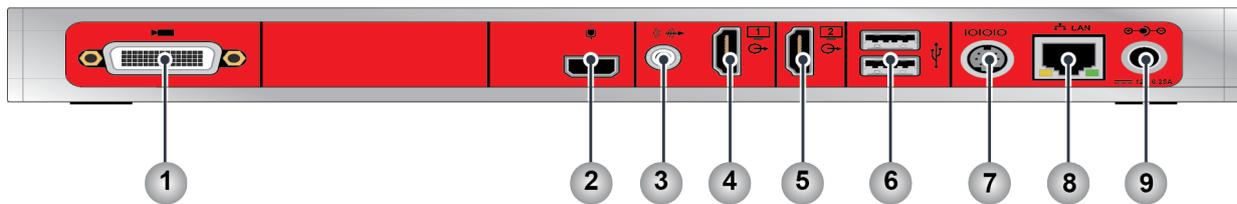

Ref. Number	Location in Web Interface: Admin Settings >	Input/Output	Supported Formats	Description
1	Audio/Video > Video Inputs > Input 1	Video Input	HDCI	Input for the camera
2	N/A	Microphone Input	Polycom Microphone	Audio input for up to two Polycom microphone arrays or a SoundStation IP 7000 speaker phone or SoundStructure mixer
3	Audio/Video > Audio > Audio Output	Audio Output	3.5mm Stereo	Audio output for main monitor audio or external speaker system System tones and sound effects + Audio from the far site +

Ref. Number	Location in Web Interface: Admin Settings >	Input/Output	Supported Formats	Description
4	Audio/Video > Monitors > Monitor 1	Video Output 1	<ul style="list-style-type: none"> HDMI version 1.3 with embedded audio DVI-D 	Output for Monitor 1
5	Audio/Video > Monitors > Monitor 2	Video Output 2	<ul style="list-style-type: none"> HDMI version 1.3 DVI-D 	Output for Monitor 2 (available only with a monitor option key)
6	N/A	USB Connectors	USB 2.0	USB for Software Update, remote control battery charging
7	General Settings > Serial Ports	Serial Port	RS-232	Serial port
8	Network > LAN Properties	LAN Port	Ethernet	Connectivity for IP and SIP calls, People+Content IP, and the system web interface
9	N/A	Power Input	12 V 6.25 A	Power input