




# **Poly Documentation**

# Contents

1. Polycom RealPresence Group 310 System. ....	3
------------------------------------------------	---

# Polycom RealPresence Group 310 System

The following figure and accompanying table below shows how the system web interface settings relate to hardware input and outputs on the back of the RealPresence Group 310 system.

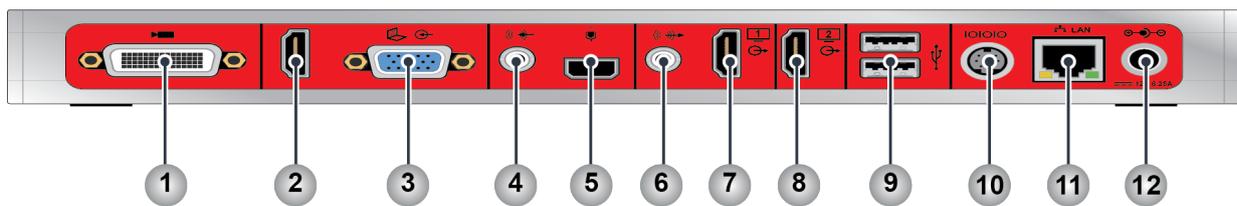

Ref. Number	Location in Web Interface: Admin Settings >	Input/ Output	Supported Formats	Description
1	Audio/Video > Video Inputs > Input 1	Video Input 1	HDCI	Input for Camera 1
2	Audio/Video > Video Inputs > Input 2 Audio/Video > Audio > Audio Input > Type: HDMI	Video Input 2/Audio Input 1	HDMI version 1.3	Auxiliary video and audio input
3	Audio/Video > Video Inputs > Input 2	Video Input 2	VGA	Video input for Content

**Note:** Use either the HDMI or VGA video input, but not both.

Ref. Number	Location in Web Interface: Admin Settings >	Input/ Output	Supported Formats	Description
4	Audio/Video > Audio > Audio Input > Type: 3.5mm	Audio Input 2	3.5mm Stereo	Stereo line-level input  3.5mm audio is independent and not associated with any video input
5	N/A	Microphone Input	Polycom Microphone	Audio input for up to two Polycom microphone arrays or a SoundStation IP 7000 speaker phone or SoundStructure mixer
6	Audio/Video > Audio > Audio Output	Audio Output 1	3.5mm Stereo	Audio output for main monitor audio or external speaker system  Audio Mix Routed to the Output:  System tones and sound effects + Audio from the far site + Audio connected to audio input 2 when associated with video input 2
7	Audio/Video > Monitors > Monitor 1	Video Output 1	<ul style="list-style-type: none"> <li>● HDMI version 1.3 with embedded audio</li> <li>● DVI-D</li> </ul>	Output for Monitor 1  When format is HDMI, audio output for main monitor audio  Audio Mix Routed to the Output:  System tones and sound effects + Audio from the far site + Audio connected to audio input 2 when associated with video input 2
8	Audio/Video > Monitors > Monitor 2	Video Output 2	<ul style="list-style-type: none"> <li>● HDMI version 1.3</li> <li>● DVI-D</li> </ul>	Output for Monitor 2; does not include audio  <b>NOTE:</b> RealPresence Group 310 systems require a dual monitor option key to allow dual monitor output.

<b>Ref. Number</b>	<b>Location in Web Interface: Admin Settings &gt;</b>	<b>Input/ Output</b>	<b>Supported Formats</b>	<b>Description</b>
9	N/A	USB Connectors	USB 2.0	USB for software update, remote control battery charging
10	General Settings > Serial Ports	Serial Port	RS-232	Serial port
11	Network > LAN Properties	LAN Port	Ethernet	Connectivity for IP calls, People+Content IP, and the system web interface
12	N/A	Power Input	12 V 6.25 A	Power input