



Low Pressure Fixed Displacement Vane Pump



Model Code

VCM	-150T	-75	-F	-R
Series	Series Number	Vane Pump Displacement (c.c./rev)	Installation Type	Rotating Direction*
VCM Vane Pump Series	50T	07, 12, 14, 17 20, 23, 26, 30 36, 40, 43	F : Flange Type L : Foot Type	R : Clockwise L : Counterclockwise
	150T	48, 61, 75 94, 116, 125		

Remark:

* Viewed from shaft end

Feature

- High pressure, high efficiency, suitable for all kinds of machines.
- Low noise; agree to low-noise environmental requirement.
- Long product life span
- Pressure balanced structure, low shaft load

Application

- Industrial machinery
- Special purpose machine
- Oil hydraulic press



全懋精機股份有限公司
Camel Precision Co., Ltd.

Low Pressure
Fixed Displacement Vane Pump




Technical Data

Type	Theoretical Displacement (c.c. /rev.)	Max. Pressure (bar)	Shaft Speed Range (rpm)		Weight (kg)		Inlet	Outlet
			Max	Min	Foot Type	Flange Type		
50T-07	7.0	70	1800	1200	10.5	9	1"	3/4"
50T-12	12.0	70	1800	950	10.5	9	1"	3/4"
50T-14	14.5	70	1800	950	10.5	9	1"	3/4"
50T-17	17.5	70	1800	950	10.5	9	1"	3/4"
50T-20	20.0	70	1800	950	10.5	9	1"	3/4"
50T-23	23.0	70	1800	950	10.5	9	1"	3/4"
50T-26	26.2	70	1800	950	10.5	9	1"	3/4"
50T-30	29.4	70	1800	950	10.5	9	1"	3/4"
50T-36	35.6	70	1800	950	10.5	9	1"	3/4"
50T-40	40.0	70	1800	950	10.5	9	1"	3/4"
50T-43	43.0	70	1800	950	10.5	9	1"	3/4"
150T-48	48.3	70	1800	900	26	25	1-1/2"	1-1/4"
150T-61	61.5	70	1800	900	26	25	1-1/2"	1-1/4"
150T-75	75.5	70	1800	900	26	25	1-1/2"	1-1/4"
150T-94	94.2	70	1800	900	26	25	1-1/2"	1-1/4"
150T-116	116	70	1800	900	26	25	1-1/2"	1-1/4"
150T-125	125	70	1800	900	26	25	1-1/2"	1-1/4"




Dimension

VCM-50T-*L* (Foot Type)

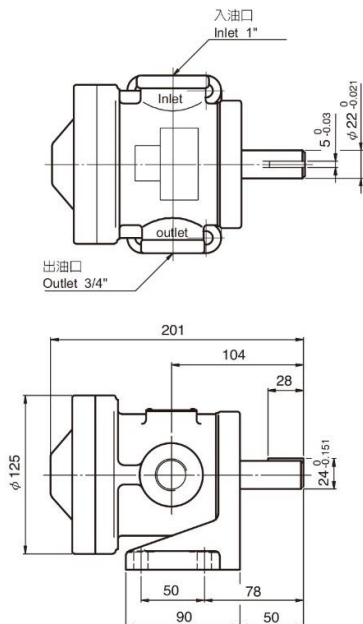


VCM-50T-*F* (Flange Type)

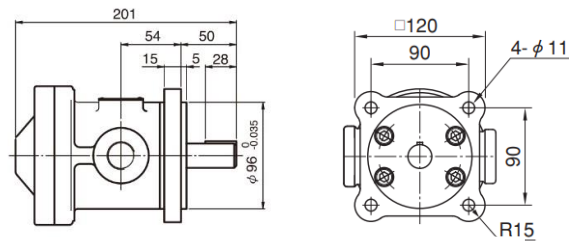


Other measurements refer to flange type

VCM-150T-*L* (Foot Type)

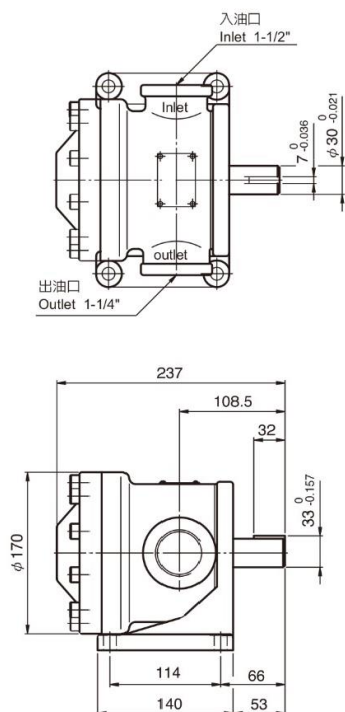

VCM-150T-*F* (Flange Type)

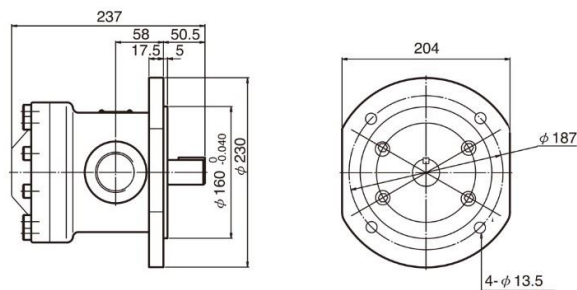

Other measurements refer to flange type

