

The MAXHUB UC P25

# THE COLLABORATION CHAMPION

## 4K UHD PTZ Camera


Phenomenal 4K camera quality meets with state-of-the-art remote controls in the UC P25, for natural, seamless, and organic meeting experiences.

As the top-performing PTZ camera from MAXHUB, the UC P25 is perfect for companies in search of unrivalled quality.



### Premium Visuals

Unrivalled UHD imaging technology delivers sensational and vibrant videos for every meeting.

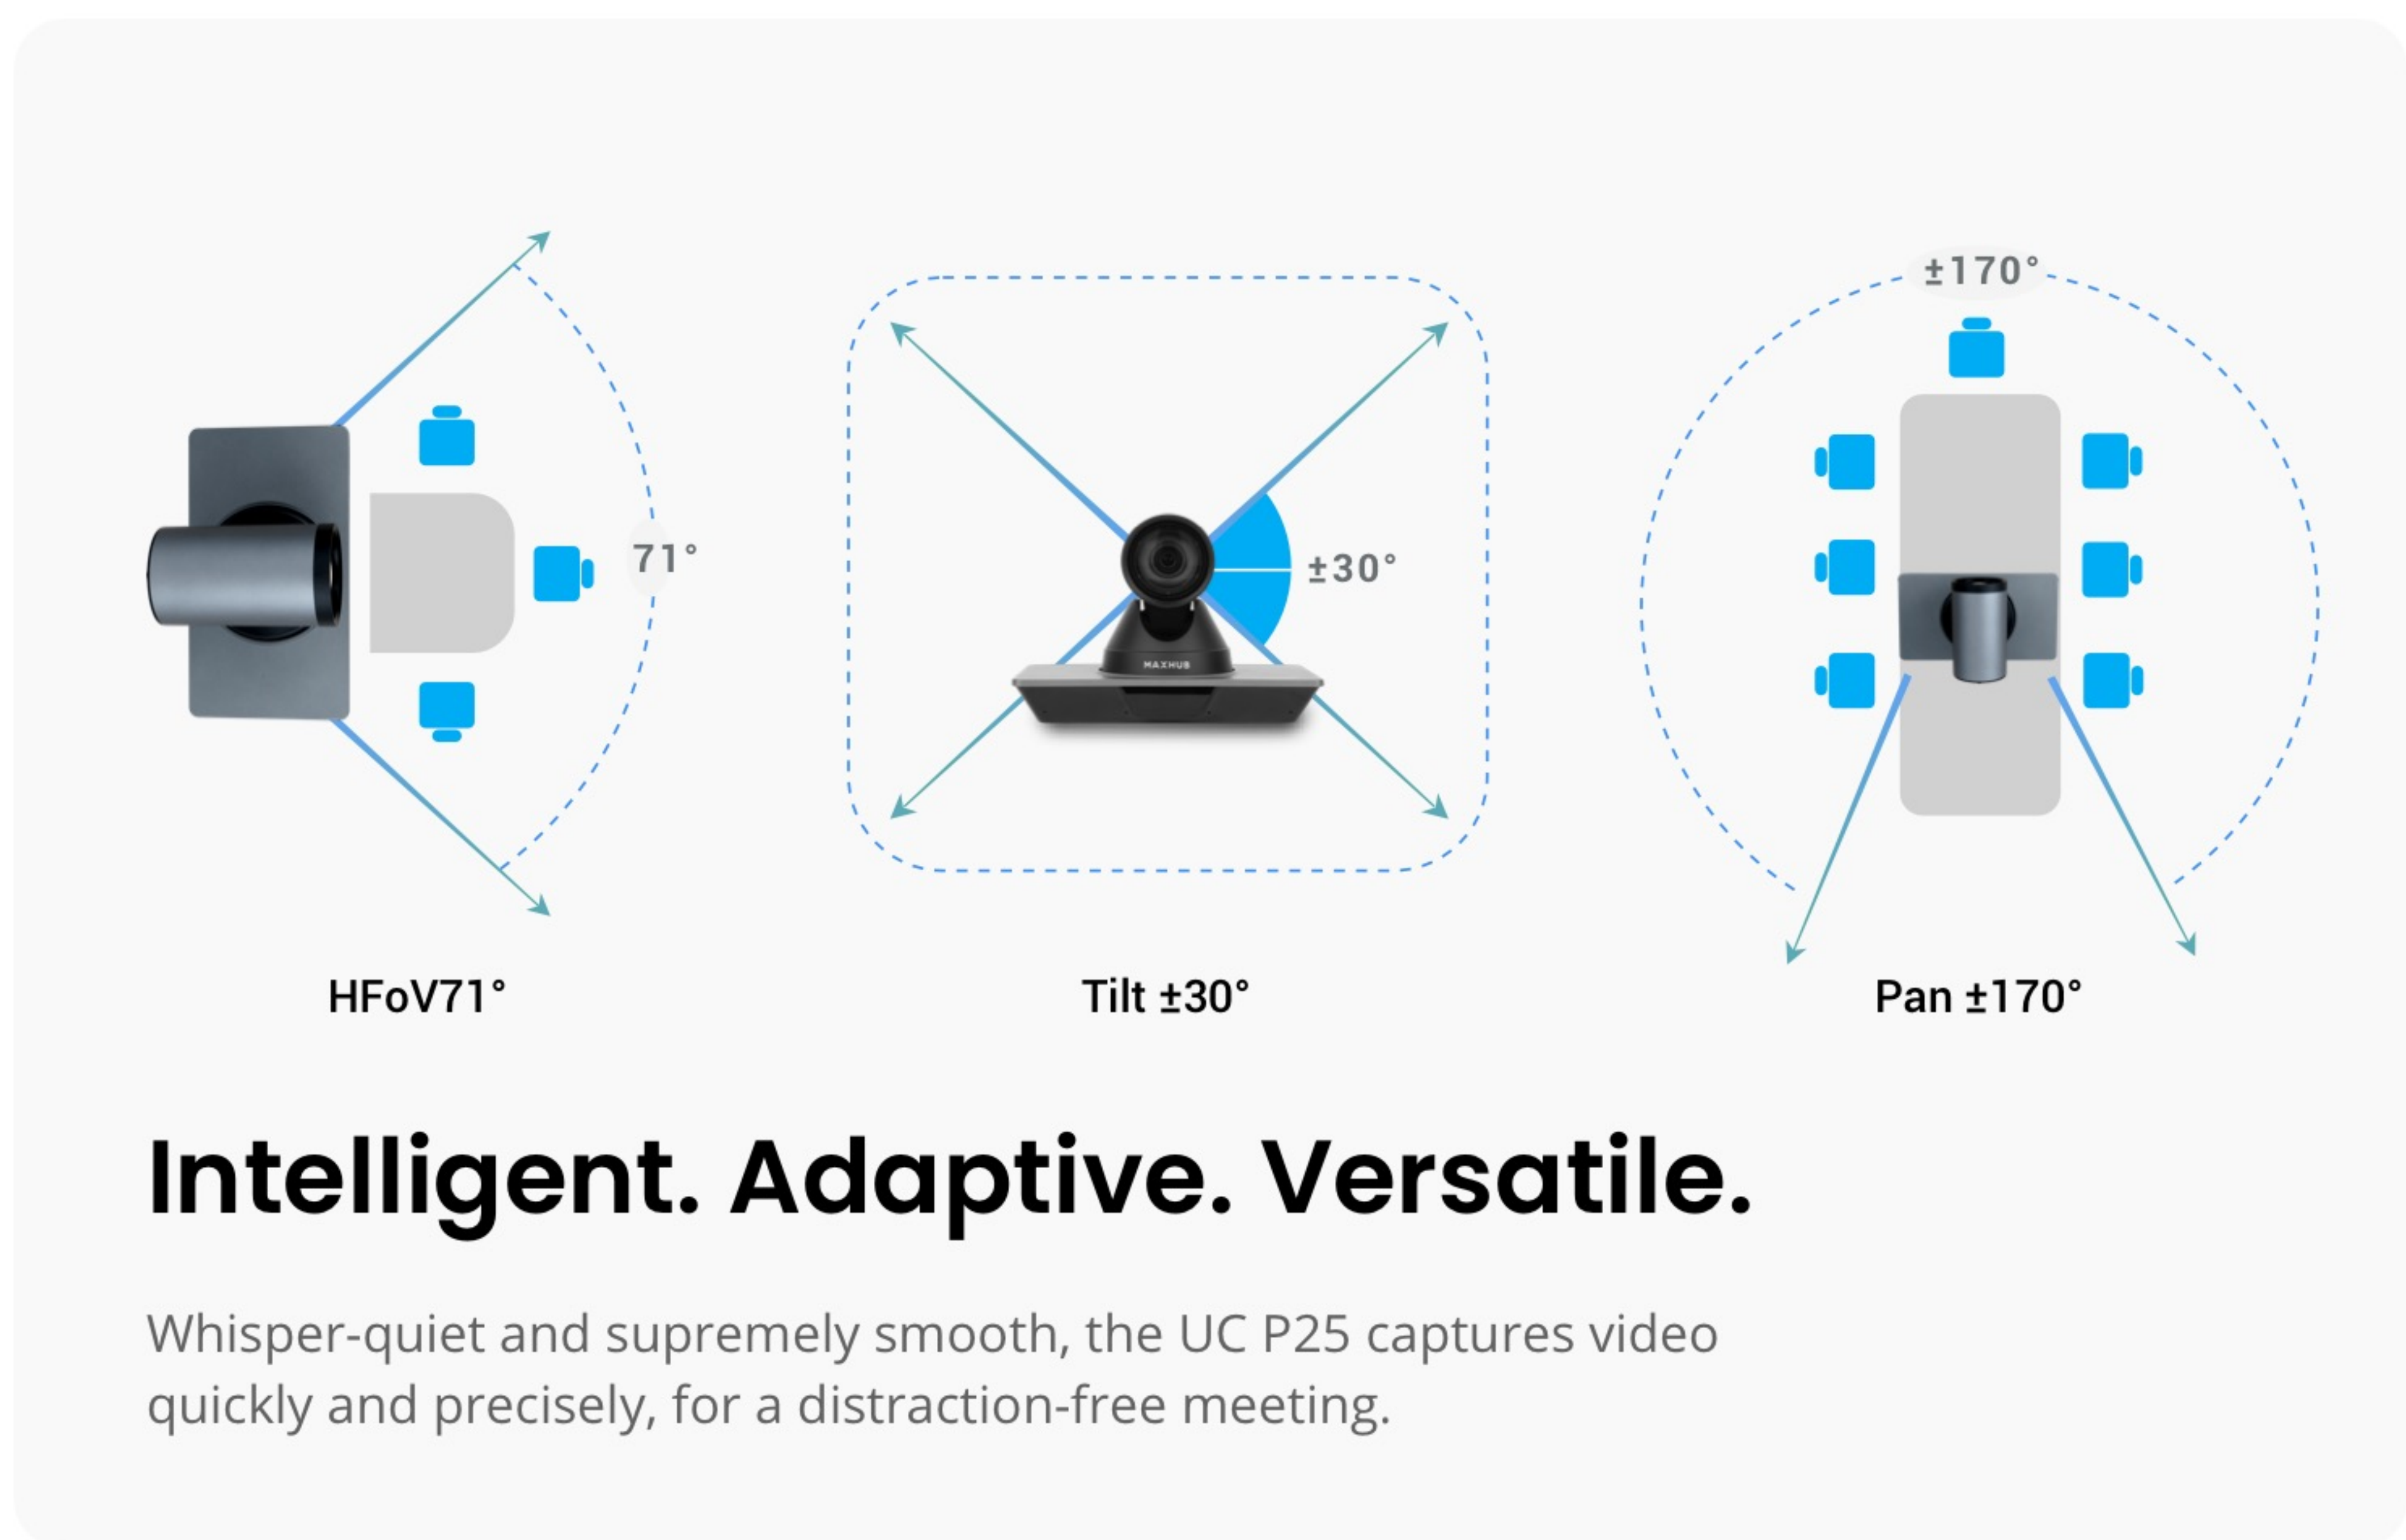

### Intelligent. Adaptive. Versatile.


Whisper-quiet and supremely smooth, the UC P25 captures video quickly and precisely, for a distraction-free meeting.

### Complete Clarity. Anywhere.


Illuminate the possibilities with MAXHUB UC P25. Our state-of-the-art algorithms could easily maintain color and detail in dim lighting.



> Low lux technology

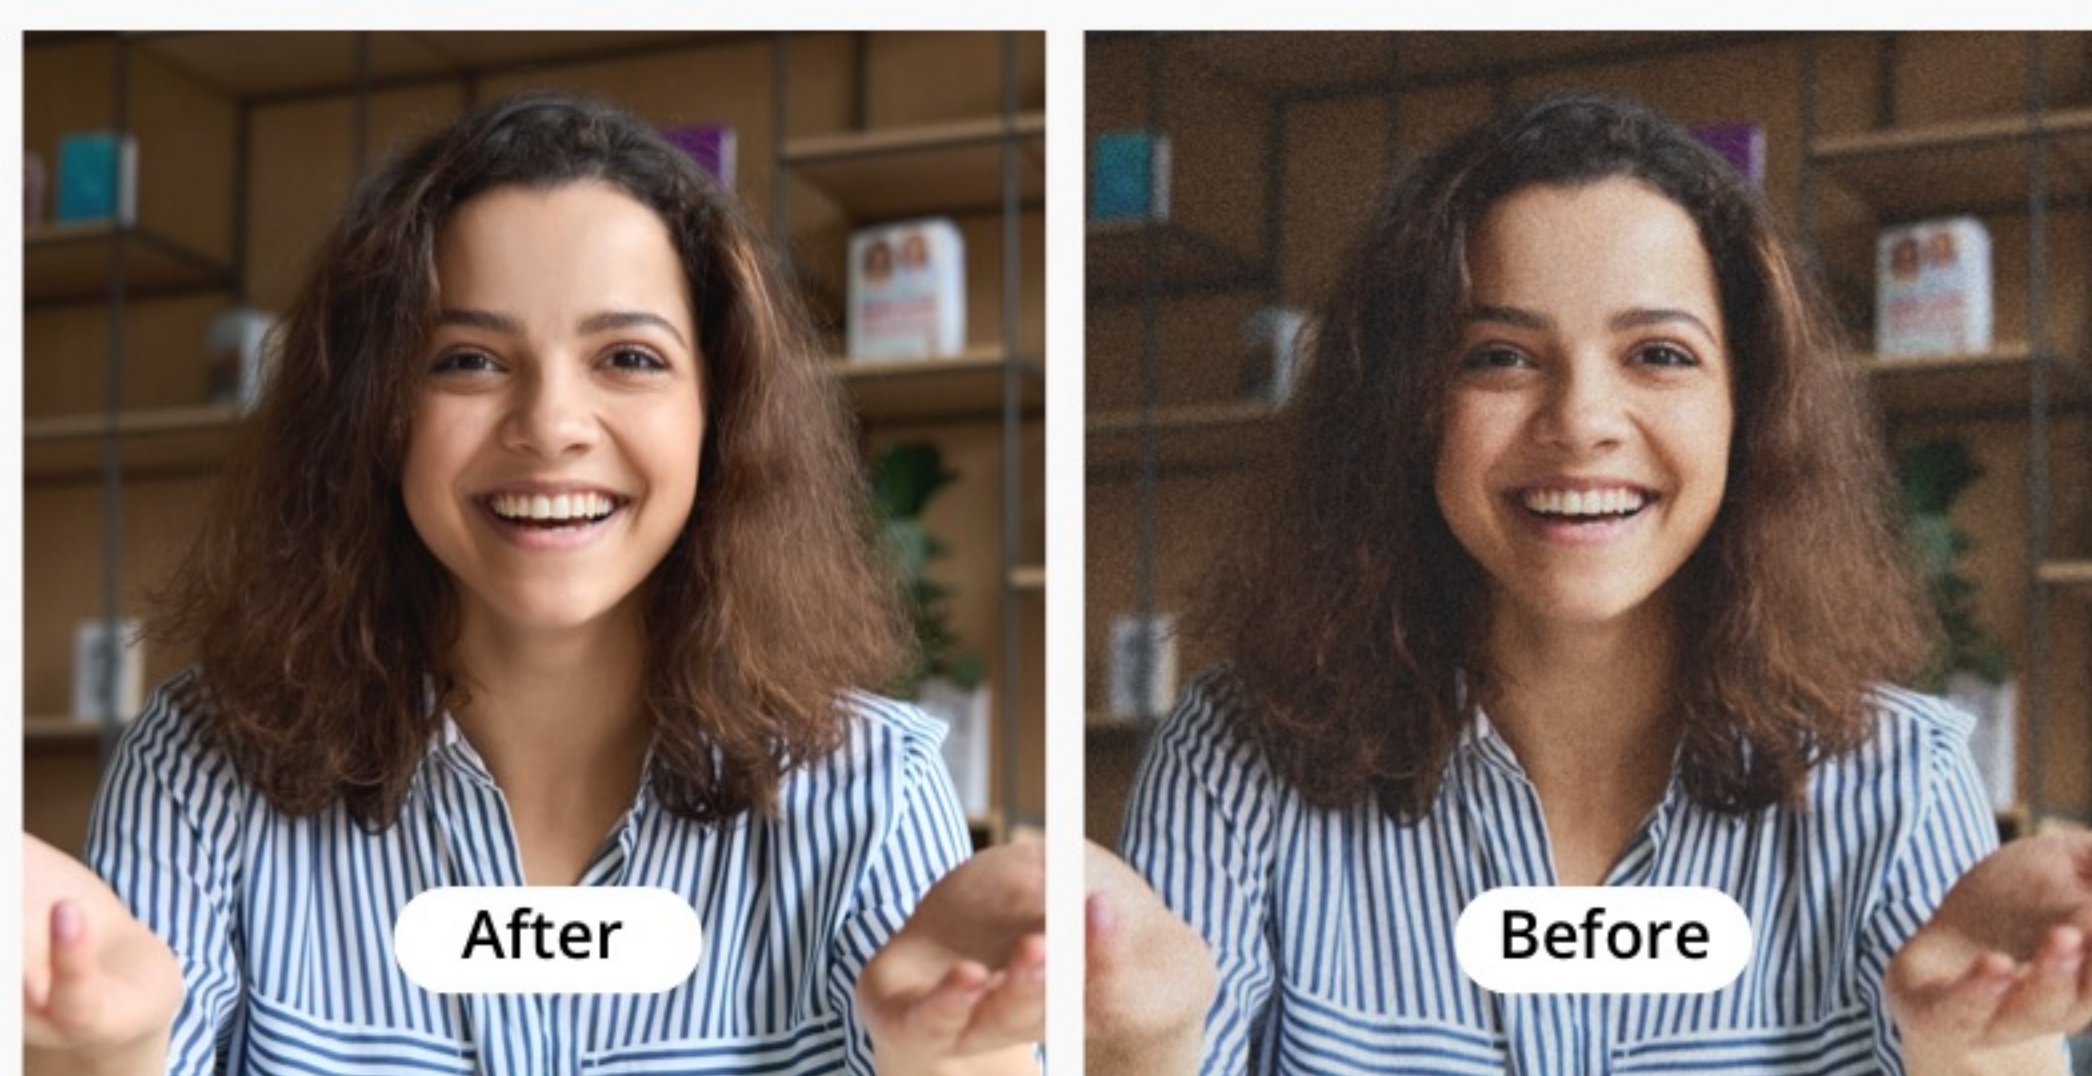

> 2D & 3D DNR

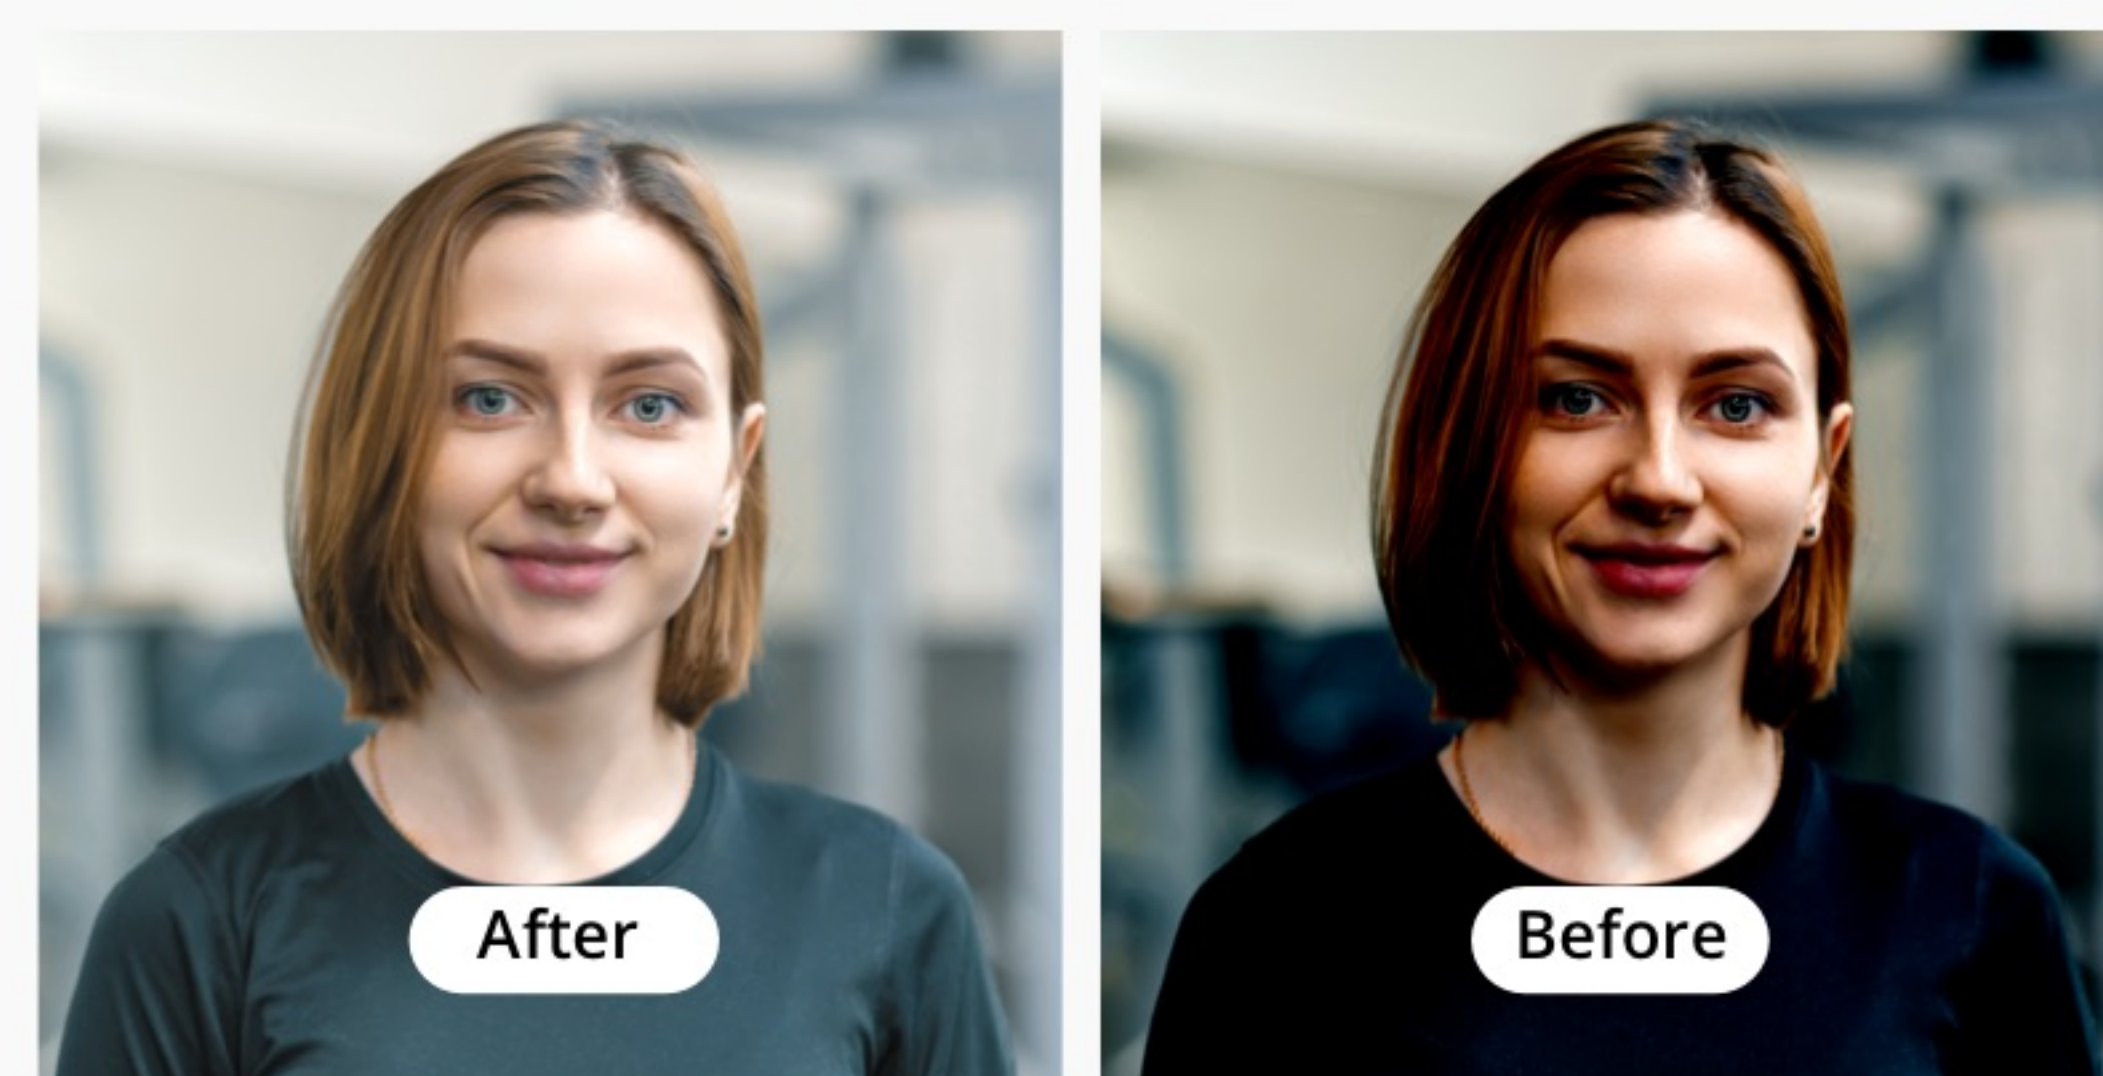

> WDR

### The Perfect Views. Always.

Adapt your meeting to suit your needs.

> Easy to control


- IR Controller
- Web / Software
- Serial Controller
- UVC Control

> Support VISCA, PELCO, UVC, ONVIF protocols



## Plug-and-Play Simplicity

The UC P25 provides abundant connectivity to work with various video applications through the industrial standard interfaces.

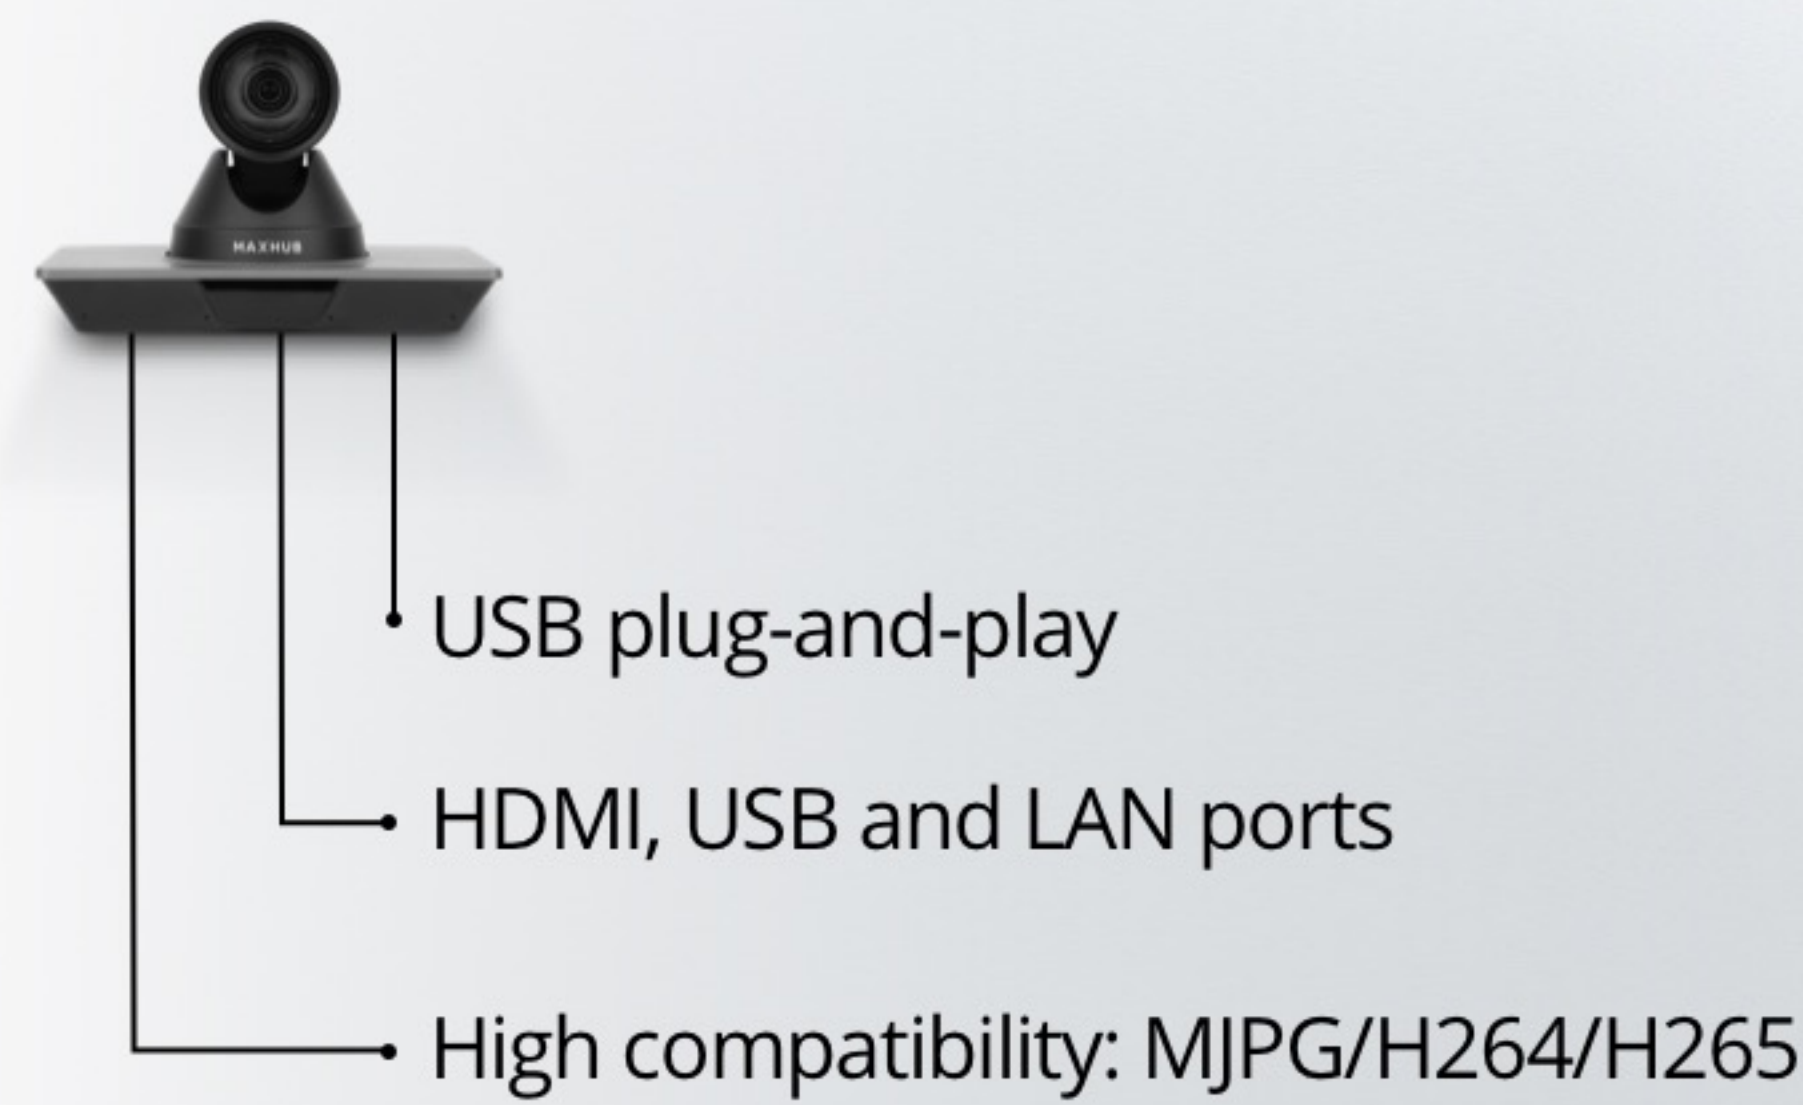

## One Cable for Everything

The UC P25 delivers a one-cable power over Ethernet solution to reduce the overall cost of installation.



3-Year Hot Swap Warranty



## Premium Peace of Mind

The powerful UC P25 comes with an industry first 3-Year Hot Swap Warranty, for absolute peace of mind.

## Specification

<b>Camera</b>		<b>Network Features</b>	
Video Format	4K@30fps, 4K@25fps, 4K@29.97fps, 1080P@60fps, 1080P@50fps, 1080I@60fps, 1080I@50fps, 1080P@30fps, 1080P@25fps, 1080P@59.94fps, 1080I@59.94fps, 1080P@29.97fps, 720P@60fps, 720P@59.94fps, 720P@50fps	Video Compression	H.264 / H.265 / MJPEG
Sensor	1/2.5 inch, CMOS, Max Effective Pixel: 8.51M	Video Stream	First Stream, Second Stream
Optical Zoom	12x (f = 4.4mm ~ 52.8mm, F1.8 ~ F2.6)	First Stream Resolution	3840x2160, 1920x1080, 1280x720, 1024x576
Digital Zoom	16x	Second Stream Resolution	720x480, 720x408, 640x480, 640x360, 480x320, 320x240
Minimum Illumination	0.5 Lux @ (F1.8, AGC ON)	Audio Compression	AAC/G711A
White Balance	Auto, Indoor, Outdoor, One Push, Manual	Audio Bit Rate	96Kbps, 128Kbps
Backlight Compensation	Support	Protocols	TCP/IP, HTTP, RTSP, RTMP/RTMPS, ONVIF, DHCP, SRT, Multicast
Digital Noise Reduction	2D & 3D Digital Noise Reduction	<b>Input/Output Interface &amp; Control</b>	
Horizontal Angle of View	71°	Network Interface	1 x RJ45: 10/100/1000M Adaptive Ethernet Port
Vertical Angle of View	42.7°	Control Interface	1 x RS232 IN, Protocol: VISCA / Pelco-D / Pelco-P 1 x RS232 OUT, Protocol: VISCA 1 x RS485, Protocol: VISCA / Pelco-D / Pelco-P
Diagonal Angle of View	82.8°	Audio Interface	1 x LINE IN: 3.5mm Audio Interface
Horizontal Rotation Range	±170°	HDMI Interface	1 x HDMI: Version 1.4
Vertical Rotation Range	±30°	3G-SDI Interface	1 x 3G-SDI: BNC type
Pan Speed Range	1.6°/s ~ 76°/s	USB Interface	1 x USB 2.0 (Type-B) : Up to 4K@30fps compressed video and 1080P original video can be output
Tilt Speed Range	0.5°/s ~ 15°/s	Power Jack	JEITA type (DC IN 12V)
Number of Preset	255	<b>Physical Specifications</b>	
Preset Accuracy	0.1°	Input Voltage	DC 12V
Video Format	③ H.264 AVC: max to 2160P@30fps ③ H.264 SVC: max to 2160P@30fps ③ MJPEG: max to 2160P@30fps	Current Consumption	1.0A (Max)
<b>USB Features</b>		Operating Temperature	-10°C ~ 40°C
Operate System	Windows 7, Windows 8, Windows 10, Mac OS X, Linux, Android	Storage Temperature	-40°C ~ 60°C
Encode Format	H.264 / MJPEG	Power Consumption	12W (Max)
Video Format	H.264 up to 2160p@30fps, MJPEG up to 2160p@30fps	Camera Dimension	238mm x 167mm x 149mm
USB Audio	Support	Camera Net Weight	1.35Kg
USB Video Communication Protocol	UVC 1.1~1.5	<b>Package Contents</b>	
UVC PTZ	Support	UC P25 Camera	1
<b>Warranty</b>		USB 3.0 Cable (2m)	1
Camera	3 years	Remote Control	1
Accessories	1 year	Mounting Screw Set	1
		Lens Cover	1
		Power Adaptor	1
		Wall-mount bracket	1
		User Manual	1
		<b>Compatible Application</b>	
		Support Major VC Software	ZOOM, Microsoft® Teams, Google Meet, Google Hangouts, Cisco WebEx®, RingCentral, etc.