



Specifications

Controller SD700E

Features

SD700E is a controller of Unilumin with big load capacity and has following features:

- 1) 1 DVI input.
- 2) DVI output for cascading or monitoring.
- 3) 1 HDMI input/output.
- 4) 1 audio input.
- 5) USB or RS232 control.
- 6) Able to cascade multiple units for uniform control.
- 7) Biggest loading resolution: 2048×1152 or 1920×1200.

Appearance



Indicator Lights	
RUN	<p>Equipment operation indicator 1</p> <p>The light blinks slowly when no video source is available. (It keeps on for 2 seconds and then off for 2 seconds alternately.)</p> <p>It blinks normally when video source is available. (It blinks about twice per second.)</p> <p>It blinks quickly when start-up screen is displayed.</p> <p>When the redundancy works, it blinks at a frequency of breathing.</p>
STATUS	<p>Equipment operation indicator 2</p> <p>When the equipment runs normally, the light is always on.</p> <p>It blinks at a frequency of breathing during authorization.</p>




Power	
AC-100-240V-50/60HZ	AC power interface
Inputs	
AUDIO	Audio input
DVI IN	DVI input
HDMI IN	HDMI input
Outputs	
DVI OUT	DVI output

HDMI OUT	HDMI output
OUT1~6	6 Ethernet outputs
Control	
USB	Connecting PC, USB control
RS232 IN/OUT	Cascade input/output
Ethernet IN/OUT	Cascade input/output

Dimensions

19" 1U standard rackmount

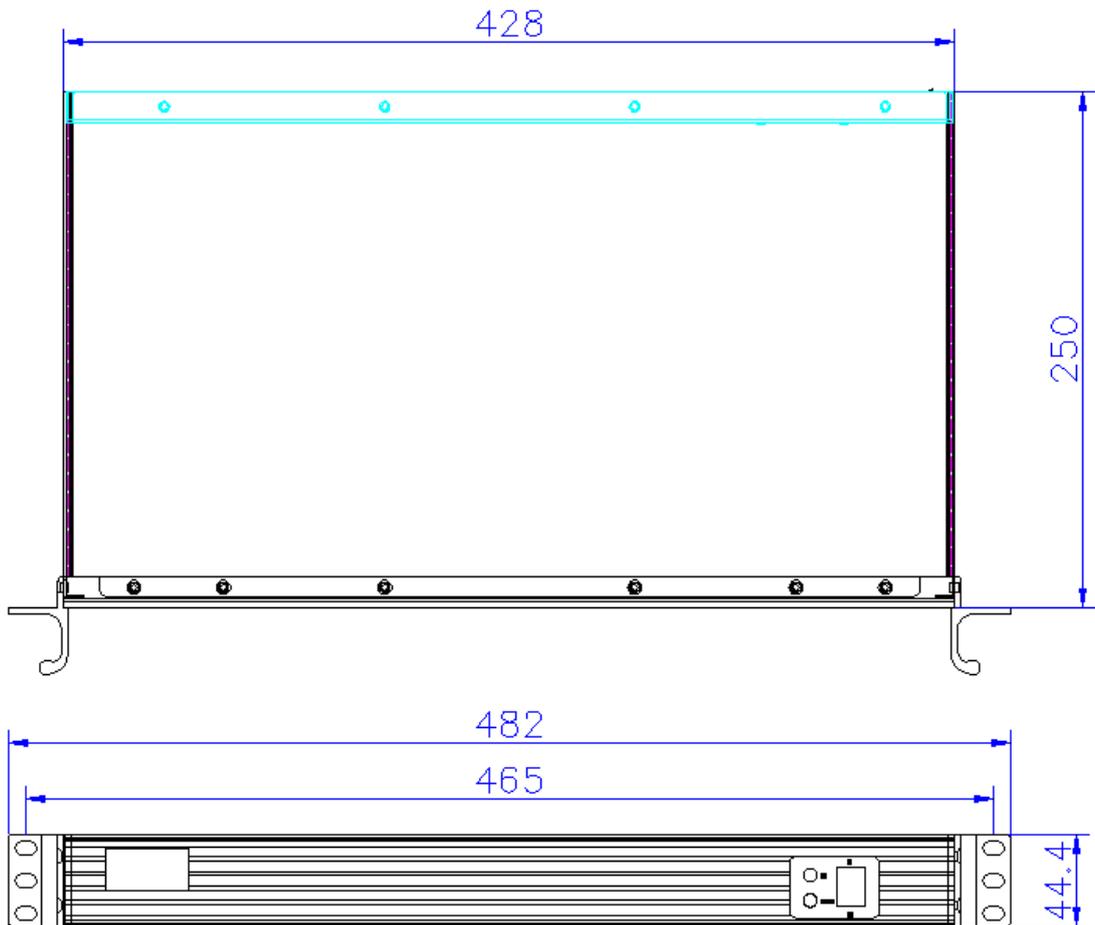

单位: mm

Specifications

Input Index		
Port	Qty	Resolution Specification
DVI IN	1	VESA standard
HDMI	1	EIA/CEA-861 standard, compliance with HDMI-1.3 standard, supports HDCP

Overall Specifications	
Overall power consumption	16W
Ambient temperature	-20°C~60°C
Ambient humidity	0%~95%
Net weight	2.9 Kg
USB cable	1.5 M
DVI cable	1.5 M