
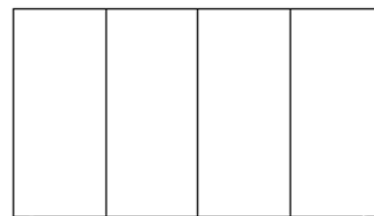


## Lmate Series

### LHP1.2 High Integration Creative NPP

#### Product features:

- 16:9 Golden Ratio Cabinet;
- High Integration Design
- Big Curve: Right angle/Concave
- Wireless modules
- Front Maintenance
- Intelligent modules (Optional)
- Dual backups (Optional)
- GOB Technology (Optional)

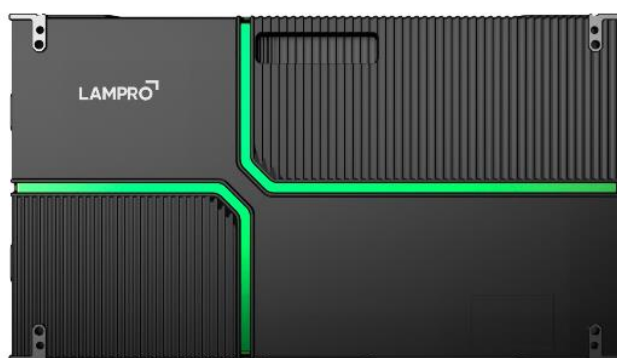

## Main Technical Specifications:

Parameter	Value
Pixel Pitch	1.2mm
LED Type	SMD1010
Brightness	600cd/m <sup>2</sup>
Panel Size	600x337.5x45mm
Panel Weight	4kg/panel
Module Size	150×337.5mm
Pixel Density	640000pixels/m <sup>2</sup>
Pixels Per Panel	480x270pixels
Maintenance	Front
Ingress Protection	Rear IP30
Curve	Customized according to customers' needs
Panel Area	0.2025 m <sup>2</sup>
Environment	Indoor
Material	Die-cast Aluminum
Calibration	Support brightness and chroma
Color Temperature	2,000K~9,300K Adjustable
Horizontal Viewing Angle	160°
Vertical Viewing Angle	160°
Contrast Ratio	5000:1
Input Power <Max>	120±10%W/Panel
Input Power <Typical>	40±10%W/Panel
Input Voltage	100~240VAC
Processing Depth	≥14bit
Refresh Rate	≥3840Hz
Video Frame Rate	50&60Hz
Input Power Frequency	50~60Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-10°C~+45°C/10~70%RH
Storage Temperature/Humidity	-20°C~+55°C/10~80%RH
Standard Mounting Configuration	Fixed
Certification	CE/CB/FCC/ETL/ROHS/EAC/KC/PSE

### Note:

- 1.Product pictures are for illustration only, the actual product effects (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product.
- 2.The specification parameters are reference values. Part of the data comes from Unilumins internal laboratory and is obtained under a specific test environment. In actual use, it may be slightly different due to product batch differences, configuration differences, software versions, use conditions and environmental factors. Actual usage shall prevail.
3. Different configurations can achieve different refresh rates.