

MXF 627 OX *XSafe*

Scotsman
Ice Systems

Modular ice machine up to 300 kg



CHARACTERISTICS

- Materials: AISI 304 stainless steel and new removable grill
- Core Ice System: stable evaporation system (axial load).
- New main evaporator: highly balanced scroll (double profile system).
- New gear motor: improved evaporator stability and noise reduction.
- Innovative icebreaker: very dry ice - 12% water content.
- Easy cleaning process and standard XSafe (automatic sanitization system).
- New high-tech water tray with easy adjustment system.
- New ice level sensor: for uninterrupted operations.
- New display: touch and smart. XWave: New app with improved electronics and programming.



MXF SUPER FLAKE
SUPER FLAKE

Model	Cube	Ø	H	Weight
MXF SUPER FLAKE				

CONDENSING SYSTEM

Air condensation
Water condensation

REFRIGERANT GAS
R290

VOLTAGE V/HZ/PH
230\50\1
220-240\60\1

RECOMMENDED BIN

Bin	Compatibility
NB 193	✓
SB 193	✓
SB 322	✓
SB 293	SCBINTOPMXFSB30
NB 393	SCBINTOPMXFSB30
SB 393	SCBINTOPMXFSB30
SB 530	SCBINTOPMXFSB30
SB 550	SCBINTOPMXFSB42
SB 948	SCBINTOPMXFSB48
SB1025	SCBINTOPMXFSB52
UBH 1100	•
SIS 300	•
SIS 700	•

LEGEND

✓ : Perfect combination of machine and container

• : Ice drop hole to be cut at installation

CBTxxxxxxxxx : Additional accessory required

CERTIFICATIONS



OPERATIONAL REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Voltage	-10%	+10%

IMPORTANT NOTE


Models and specifications are subject to change without notice.
This spec sheet is for sales purposes only. For technical documentation, please refer to our service manuals.

www.scotsman-ice.it

MXF 627 OX *xSafe*

Scotsman®
Ice Systems

Modular ice machine up to 300 kg

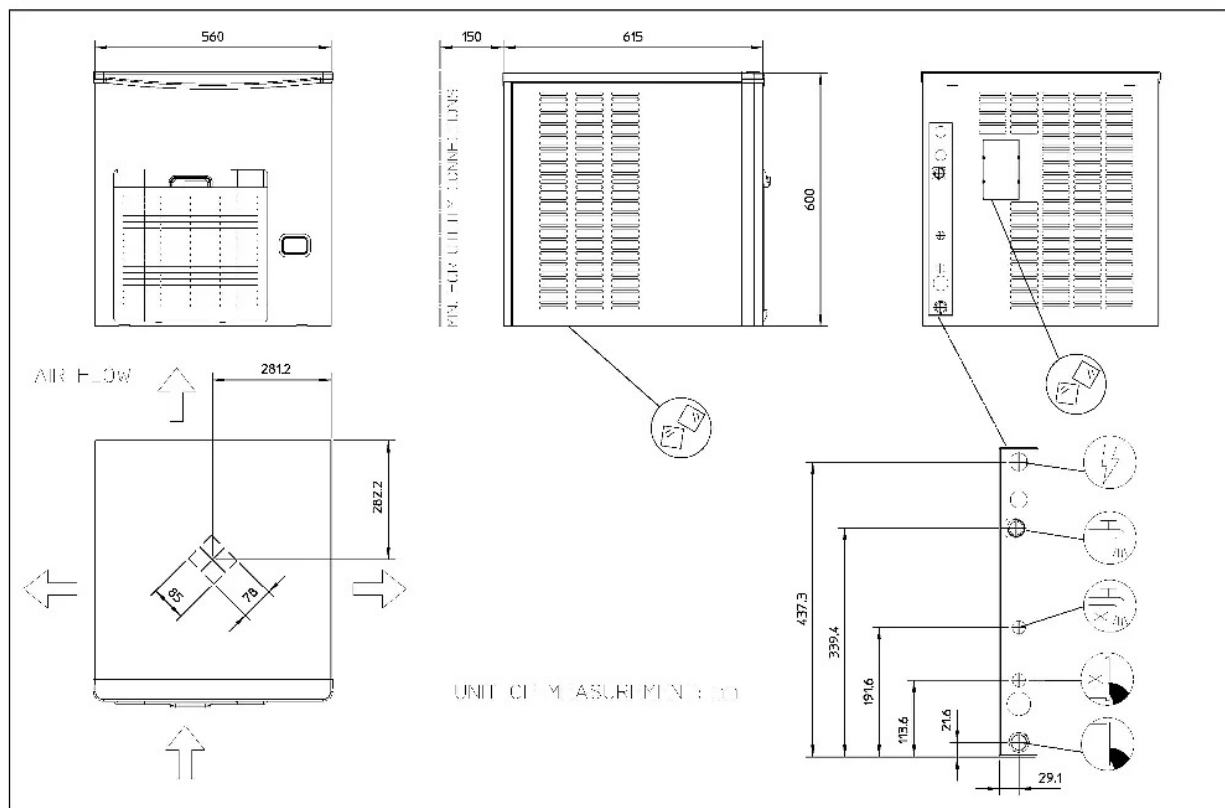

MACHINE DATA

Dimensions (LxWxH): 560 x 615 x 600 mm
Net weight 58 kg

SHIPPING DATA

Dimensions (LxWxH): 63 x 69 x 78 cm
Peso netto 71 kg

(*) The data refers to the following temperature conditions:
32°C Ambient / 21°C Water

			Ice production kg in 24 h °C Ambient / °C Water			Heat dispersion	Consumo Energia (*)	Consumption Water (*)	Instant power	Cables	Fuse
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm²	A
MXF 627 AS 230/50/1	230\50\1	A	300	270	230	2,10	25,0	9,0	1080	1,50	10
MXF 627 WS 230/50/1	230\50\1	W	280	265	230	2,20	21,0	83,0	900	1,50	10
MXF 627 AS 230/50/1	230\50\1	A	300	270	230	0,00	25,0	9,0	1080	1,50	10
MXF 627 AS 230/60/1	220- 240\60\1	A	330	295	224	2,30	28,0	9,0	1250	1,50	10