

NXW 308

Scotsman

Modular Ice Machine 160 kg

Item # :

Project :

Quantity :



FEATURES

- Energy & Water Consumption——Energy Star
- Refrigerant R410 / R290
- NSF and DOE fully compliant
- New built -in self-cleaning options: XSAFE (Option)
- Control - New hardware
- Easy Clean Ability
- Easy Service Ability
- New Core Evaporator
- New Water System
- New Design Scheme of Falling Ice
- New Design Water Pump
- New Water Level Controller
- New Water Distributor



NXW 308
Dice-10g
W22 xD22xH22 mm



NXW H 308
Half Dice-6g
W10 xD22xH28 mm



NXW L 308
Large Dice-15g
W28 xD22xH28 mm

**CONDENSING
SYSTEM**
Air cooled

**REFRIGERANT
GAS**
R410

**VOLTAGE
V/ Hz /ph**
230/50/1

RECOMMENDED BINS

Head	Bins		kg
NXW 308	✓	NB 193	129
	CBT 30 EM CD	NB 393	178
	CBT 30 EM CD	NB 530	243

LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation



CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10 °C	40 °C
Water temperature	5 °C	35 °C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	- 10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

Down load our free **App Scotsman Ice**
Apple Store
Google play
Windows Store

DOWNLOAD

www.scotsman-ice.it
www.scotsman-ice.com

NXW 308





Scotsman

Modular Ice Machine 160 kg


Item # :

Project :

Quantity :

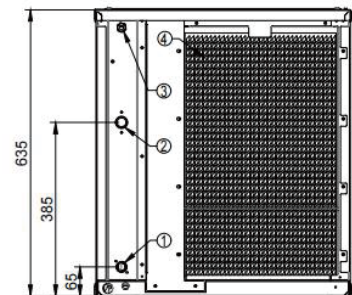

1. 3/4" GAS-WATER OUTLET
2. 3/4" GAS-WATER INLET
3. CORD SET
4. AIR INLET / AIR FILTER

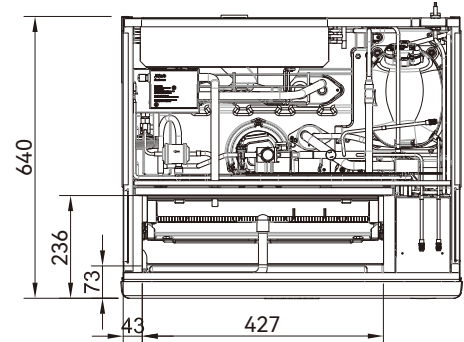

UNIT DATA

Size WxDxH 565 x 640 x 635 mm
Net weight 57 kg

SHIPPING DATA

Carton WxDxH 700 x 620 x 810 mm
Weight 69 kg

(*) Data refer to
32°C Amb. / 21°C Water
temperature conditions

		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kwh/ 100 kg	kwh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
NXW 308 AS	230/50/1	160	145	110	11.6	12.8	7.0	560	1705	3 x 1.5	10
NXW H 308 AS	230/50/1	160	150	110	10.9	12.0	6.9	560	1705	3 x 1.5	10
NXW L 308 AS	230/50/1	160	150	100	12.1	12.1	6.9	560	1705	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

Milano Madrid Chicago Dubai Singapore Shanghai Johannesburg