

NXW 458

Scotsman

Modular Ice Machine 210 kg

Item # :

Project :

Quantity :



FEATURES

- Energy & Water Consumption——Energy Star
- Refrigerant R410 / R290
- NSF and DOE fully compliant
- New built -in self-cleaning options: XSAFE (Option)
- Control - New hardware
- Easy Clean Ability
- Easy Service Ability
- New Core Evaporator
- New Water System
- New Design Scheme of Falling Ice
- New Design Water Pump
- New Water Level Controller
- New Water Distributor



NXW 458
Dice-10g
W22 xD22xH22 mm



NXW H 458
Half Dice-6g
W10 xD22xH28 mm



NXW L 458
Large Dice-15g
W28 xD22xH28 mm

**CONDENSING
SYSTEM**
Air cooled

**REFRIGERANT
GAS**
R410

**VOLTAGE
V/ Hz /ph**
230/50/1

RECOMMENDED BINS

Head	Bins		kg
NXW 458	✓	NB 393	178
	✓	NB 530	243
	CBT 48 FM CD	NB 948	406

LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation



CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10 °C	40 °C
Water temperature	5 °C	35 °C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	- 10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

Down load our free **App Scotsman Ice**
Apple Store
Google play
Windows Store

DOWNLOAD

www.scotsman-ice.it
www.scotsman-ice.com

NXW 458




Scotsman

Modular Ice Machine 210 kg


Item # :

Project :

Quantity :

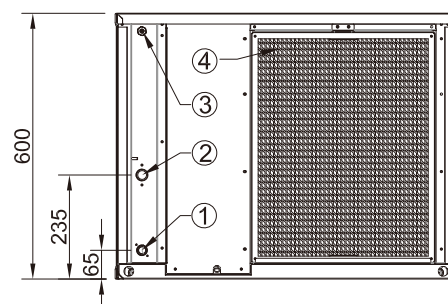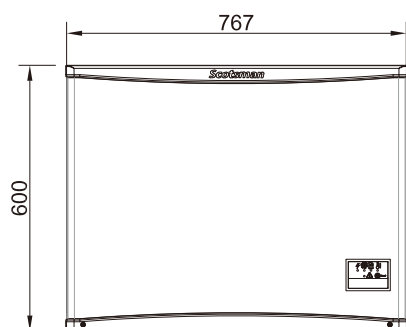

1. 3/4" GAS-WATER OUTLET
2. 3/4" GAS-WATER INLET
3. CORD SET
4. AIR INLET / AIR FILTER

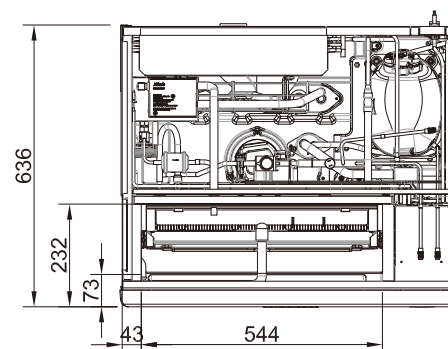

UNIT DATA

Size WxDxH 767x636x600
Net weight 70kg

SHIPPING DATA

Carton WxDxH 700x820x770
Weight 85kg

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kwh/ 100 kg	kwh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
NXW 458 AS	230/50/1	210	190	150	10.4	15.5	8.40	700	2165	3 x 1.5	16
NXW H 458 AS	230/50/1	210	190	150	10.4	15.6	8.40	700	2165	3 x 1.5	16
NXW L 458 AS	230/50/1	210	190	150	10.6	16.2	9.10	700	2165	3 x 1.5	16

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

Milano Madrid Chicago Dubai Singapore Shanghai Johannesburg