

NXW 608

Scotsman

Modular Ice Machine 320 kg

Item # :

Project :

Quantity :



FEATURES

- Energy & Water Consumption——Energy Star
- Refrigerant R410 / R290
- NSF and DOE fully compliant
- New built -in self-cleaning options: XSAFE (Option)
- Control - New hardware
- Easy Clean Ability
- Easy Service Ability
- New Core Evaporator
- New Water System
- New Design Scheme of Falling Ice
- New Design Water Pump
- New Water Level Controller
- New Water Distributor



NXW 608
Dice-10g
W22 xD22xH22 mm



NXW H 608
Half Dice-6g
W10 xD22xH28 mm



NXW L 608
Large Dice-15g
W28 xD22xH28 mm

**CONDENSING
SYSTEM**
Air cooled

**REFRIGERANT
GAS**
R410

**VOLTAGE
V/ Hz /ph**
230/50/1

RECOMMENDED BINS

Head	Bins		kg
NXW 608	✓	SB 393	178
	✓	SB 530	243
	CBT 48 FM CD	SB 948	406

LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation



CERTIFICATIONS

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10 °C	40 °C
Water temperature	5 °C	35 °C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	- 10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

Down load our free **App Scotsman Ice**
Apple Store
Google play
Windows Store

DOWNLOAD

www.scotsman-ice.it
www.scotsman-ice.com

NXW 608





Scotsman

Modular Ice Machine 320 kg

Item # :

Project :

Quantity :

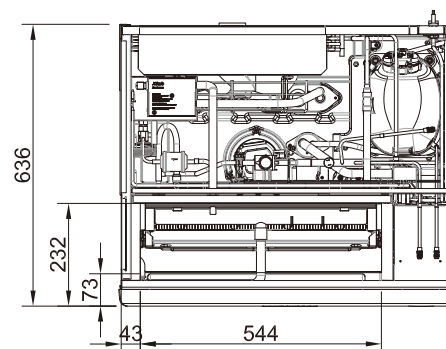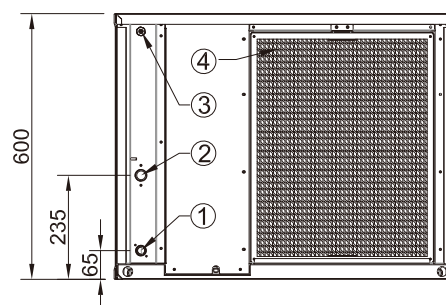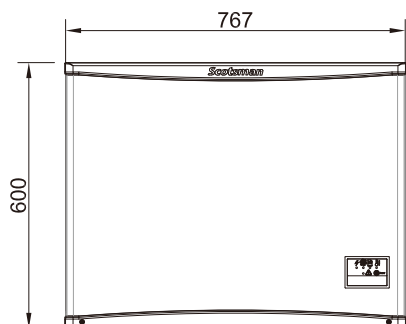

1. 3/4" GAS-WATER OUTLET
2. 3/4" GAS-WATER INLET
3. CORD SET
4. AIR INLET / AIR FILTER

UNIT DATA

Size WxDxH 767 x 636 x 600 mm
Net weight 80 kg

SHIPPING DATA

Carton WxDxH 700 x 815 x 765 mm
Weight 94 kg

(*) Data refer to
32°C Amb. / 21°C Water
temperature conditions

		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kwh/ 100 kg	kwh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
NXW H 608 AS	230/50/1	310	320	240	10.8	25.9	13.7	1100	3035	3 x 1.5	16
NXW L 608 AS	230/50/1	305	280	230	11.1	25.5	13.7	1100	3035	3 x 1.5	16
NXW 608 AS	230/50/1	300	270	220	11.2	24.7	12.3	1100	3035	3 x 1.5	16

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

Milano Madrid Chicago Dubai Singapore Shanghai Johannesburg