

SH-U1M (C) UNDER COUNTER

DESIGNED TO FIT IN ALMOST EVERY KITCHEN




FORM

The Standard variant proved to be an excellent solution in glass and dishwashing for micro dining setting. Its compact and sturdy build gives it a convenient means to be placed anywhere in the kitchen or bar.



FIT

Compact build makes it easy to FIT into your kitchen. It has simple access to maintenance and servicing, saving chunks of time for the your entire team.



FUNCTION



Optional BUILT-IN package with chemical dispensers. Performs with a breeze and convenience through its complete and integrated system.

TECHNICAL DATA

Model:	SH-U1M (C)
Dimensions (mm):	600 (W) x 607 (D) x 751~771 (H)
Loading height (mm):	310
Rack type (mm):	500 x 500
Machine net weight	68 kg

OPERATING INFORMATION

Wash temperature:	55°C - 65°C
Rinse temperature:	82°C - 90°C
Wash cycle (per rack):	90 sec
Wash rate (per hour):	40 racks
Rinse usage:	<2.1 liters per cycle
Wash tank capacity:	23.0 liters
Booster tank capacity:	4.53 liters
Noise emission db(A):	65.0 (+/- 5%)
Chemical dispensers:	Add-on feature <i>(sold separately)</i>

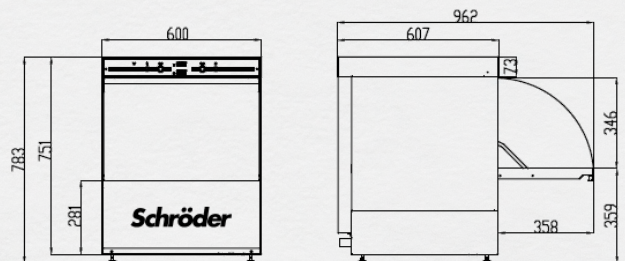

ELECTRICAL SPECIFICATIONS

Voltage supply	Booster tank	Wash tank	Wash pump	Total power loading
220V - 240V, 50/60Hz, 1 Phase	4.5 kW	2.0 kW	0.62 kW	5.5 kW, 24.0 A (Alternative Heating) 8.5 kW, 40.0 A (Full Heating)
380V - 415V, 50/60Hz, 3 Phase	4.5 kW	2.0 kW	0.62 kW	5.5 kW, 13.4 A (Alternative Heating) 8.5 kW, 19.0 A (Full Heating)
220V - 240V, 60Hz, 3 Phase	4.5 kW	2.0 kW	0.62 kW	5.5 kW, 16.5 A (Alternative Heating) 8.5 kW, 36.3 A (Full Heating)