


# HM-E300 3" Mobile Receipt Printer

- Ultra light, compact and portable
- Rugged design passed 1.5m drop test
- Bluetooth 3.0/BLE Dual Mode
- Multiple wireless interfaces, support iOS, Android, WinCE
- USB charging at your convenience
- Long-lasting battery life (5 days stand-by)
- Support various of 1D & 2D barcode printing
- OLED display
- MSR for option



**Rugged Design**

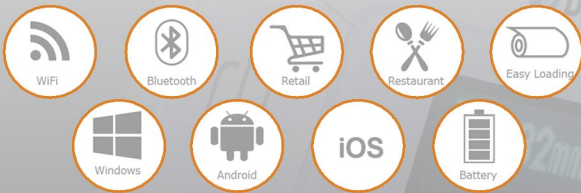

**Easy Wireless Connection**



**OLED Screen**

## Specification

| Item           | Parameter   |  |
|----------------|---|--|
| Printing       | Printing Method   | Direct Thermal Line Printing   |
|                | Resolution  | 203dpi (8dots/mm)  |
|                | Printing Speed  | Max. 70mm/s  |
|                | Printing Width  | 72mm   |
|                | Interface   | USB, Bluetooth   |
| Power Saving   | Sleep Mode  | YES  |
| Memory         | RAM   | 4 MB   |
|                | Flash   | 8 MB   |
| Resident Fonts | Font  | FONT A 12X24;FONTB 9X17;<br>CHN 24X24;16X16;                             |
|                | Alphanumeric  | 95   |
|                | Codepage  | 42   |
| Barcode        | 1D  | UPC-A, UPC-E, JAN/EAN8, JAN/EAN13, CODE39, ITF, CODEBAR, CODE128, CODE93 |
|                | 2D  | QR code, PDF417  |
| Graphics       | Support bitmap printing with different density and user defined bitmap printing |  |
| Detection      | Sensors   | Paper out/Black mark/Gap label sensor, Cover open switch                 |
| LED indicator  | Power Indicator   | Green  |
|                | Error Indicator   | Red  |

|                          |  |  |
|--------------------------|--|--|
| Power                    | Input  | AC 100-240V  |
|                          | Output   | DC 5V/1A   |
|                          | Battery  | 2300mAh/7.4V rechargeable Li-ion battery                       |
| Paper                    | Paper Type   | Continuous paper, black mark paper, linerless label, gap label |
|                          | Paper Width  | 80mm   |
|                          | Paper Thickness  | 0.053~0.13mm   |
|                          | Paper Roller Diameter  | 50mm   |
|                          | Paper Loading  | Easy paper loading   |
| Physical Characteristics | Working Condition  | -5°C~50°C, 25%~85%RH   |
|                          | Storage Condition  | -30°C~60°C, 5%~95%RH   |
|                          | Dimension  | 138.8(L)*106.3(W)*61.2(H)mm                                    |
|                          | Weight   | 475.8g (Without paper roll)                                    |
| Options & Accessories    | USB Cable, Belt Clip, Power Adapter, Paper Roll, Quick Start Guide, CD |  |
| Software                 | Emulation  | ESC/POS  |
|                          | Driver   | Windows  |
|                          | SDK  | WinCE, Win Mobile, Android, iOS                                |